

Incent.view™

SMITHS DETECTION NETWORKING SOLUTION



Feature Highlights

- Compact ruggedized design with passive cooling system
- Silent operation; noise level < 35 dB(A)
- Especially designed as Recheck, Analyst and analysis workstation
- For use as stand alone workstation or integrated in existing infrastructure
- Stackability of several Incent.view's
- Protected against unauthorized utilisation

The innovative workstation **Incent.view** is the standard hardware platform for various Smiths Heimann networking applications. **Incent.view** can be used as Recheck workstation for dual and multi view X-ray machines, as well as Recheck-, Analyst-, HMC- and HSA- workstation in networking systems.

In addition to its compact and robust design, its passive cooling system ensures an extreme low operating noise level.

The modern housing allows not only the use as stand-alone workstation but also the integration in existing infrastructures.

Mounting kits for 19" frame (e.g.: T-Box), wall fastening, table bottom mounting and stand for vertical positioning are available.

Further features e.g. lockable front -USB-ports and an on-off key switch offer protection against unauthorized utilisation.

The low average power consumption completes the advantageous design of the **Incent.view** and characterises it as a professional hardware platform, which also allows applications in rough environments (e.g.: Air Cargo locations).


General Computer Specifications

Main board	Mini-ITX-Format
Processor	2,4 GHz • graphic unit integrated
Main memory	2 GB (Two 1 GB modules)
Hard disk	100 GB-2,5"


Additional Features

Features	Passive cooling system • On-off key switch • Lockable front-USB-ports • Stackable • Covered terminal compartment • Horizontal or vertical installation
Options	Mounting kit for 19" frame (e.g.: T-Box installation) • Stand for vertical positioning • Mounting kit for wall fastening or table bottom side mounting

Controls/Connectors

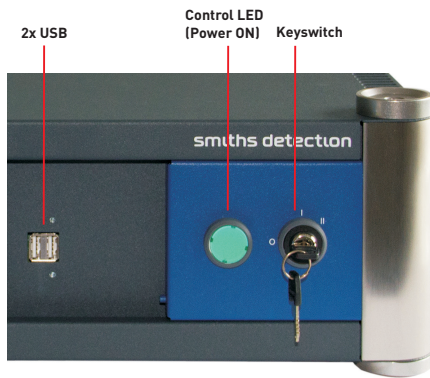

Front side

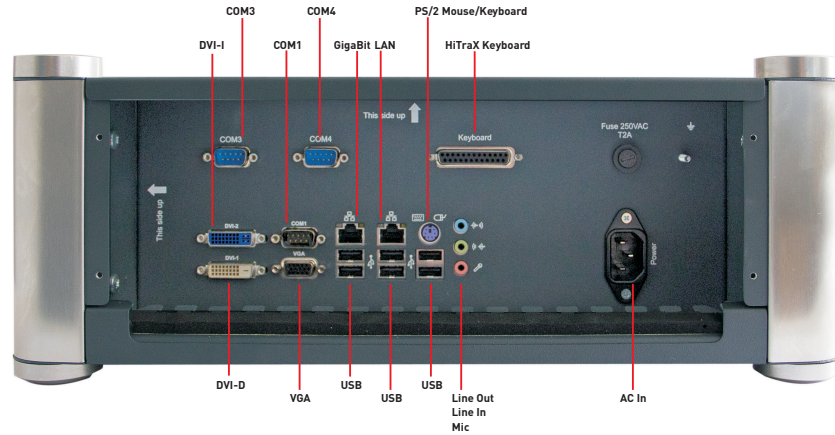

Back side (Illustration without cover)


Installation Data

CE-labelling	In compliance with all applicable European guidelines & US FCC
Sound pressure level	< 35 dB(A)
Operating-/storage temperature	0° - +40° C / -20° - +60° C
Humidity	10% - 90% (non-condensing)
Power supply	100 VAC - 240 VAC • 50 Hz - 60 Hz
Power consumption	Max. approx. 100 W
Protection class	IP 41
Dimensions • Weight	380 [L] x 380 [W] x 145 [H] [mm] • 11,5 kg
Housing	15" [L] x 15" [W] x 5.7" [H] [mm] • 25.3 lbs
Options	Powder-coated steel panel & Stainless steel


Applications

- Recheck workstation for dual & multi view X-ray machines •
- Recheck, Analyst & HSA workstation in multi-level X-ray inspection systems • HMC workstation



¹⁾ Cover is included in scope of delivery



Incent.view



Incent.view with stand

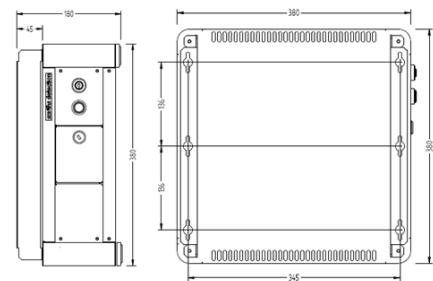

Incent.view with mounting kit for wall fastening or table bottom side mounting

For product information, sales or service, please go to www.smithsdetection.com/locations

Smiths Detection Germany GmbH, Im Herzen 4, 65205 Wiesbaden, Germany
 Modifications reserved. 95593506 01/09/2020 © Smiths Detection Group Ltd. - In some cases, the figures contain options
 Incent.view is a trademark of Smiths Detection Group Ltd.